


### Price List - 19





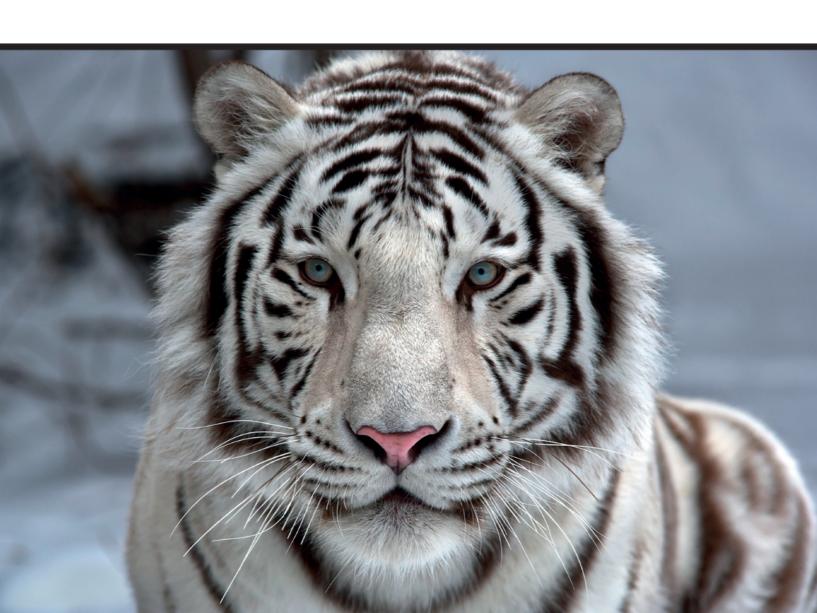

#### **PICTOGRAMS**



EXTERIOR-INTERIOR EXTERIOR-INTERIOR



INTERIOR INTERIOR



ECOLOGICAL PAINT PINTURA ECOLÓGICA



WATER-BORNE PRODUCT PRODUCTO AL AGUA



WATERPROOF PAINT PINTURA IMPERMEABLE





APPLICATION TOOLS
HERRAMIENTAS DE APLICACIÓN



WASHABLE LAVABLE



SOLVENT BORNE PRODUCT PRODUCTO AL DISOLVENTE



PERFUMED PRODUCT PRODUCTO PERFUMADO



CONTAINS ANTIMOHO PRESERVATIVE CONTIENE CONSERVANTE ANTIMOHO



TECNIMAC TINTOMETRIC SYSTEM SISTEMA TINTOMÉTRICO TECNIMAC



#### 6 - 7 - 8 - 9 - Matte plastic paints









10 - Special plastic paints





11 - Maximum Line







12 - Satin plastic paints



13 - Colors and tints



14 - 15 - 16 - Coatings





17 - Monolayer paint





#### 18 - Swimming pool paintings





19 - Sports paintings







20 - 21 - 22 - 23 - Tecnimac Tinting System









24 - Glues and fixatives









25 - Diy









26 - 27 - Waterproofing and fibers





28 - 29 - Mastics











#### 30 - 31 - Hidro-enamel



#### 32 - 33 - Synthetic enamel amarel





#### 34 - 35 - 36 - 37 - Various enamels







#### 38 - Road paint





#### 39 - Facade varnishes





#### 40 - Nitro lacquers and parquets



## 41 - 42 - 43 - Wood varnishes and water-based stains





#### 44 - Thinners and strippers





#### 45 - Decorative backgrounds







46 - 47 - 48 - Decorative finishes







#### 49 - Catalogs and color charts





50 - 51 - Sprays






52 - 53 - Utensils



### Matt EX700

#### Exterior/Interior

Matt-finish acrylic plastic paint. It is suitable for decoration of houses, either white or colored. Product with excellent whiteness, performance and covering power, very resistant to friction. Premium product.





- Henry David Thoreau.

<b>14 L</b> aprox. 22 kg.	79,08
8 L	50,09
4/L//	25,17
50 ml	6,49

COLOR	White
ASPECT	Matt
DILUTION	Water (15-20%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
DEDECORMANICE	Q_11 m <sup>2</sup> /l













### Matt COVER MAX

#### Exterior/Interior

It is a high-quality waterborne paint, with matt finish. Great covering power and excellent wash ability. Smooth finishes. Premium product. It contains anti-mold preservative.





















<b>14 L</b> aprox. 22 kg.	78,68
8 L	49,84
4 L	25,04

COLOR	White
ASPECT	Matt
DILUTION	Water (15-20%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
PERFORMANCE	8-11 m²/l.





#### Exterior/Interior

Waterborne paint with great covering power, obtaining perfectly smooth finishes of dazzling white. Premium product. It contains anti-mold preservative.









4	L	aprox. 22 kg.	73,26
8	L		42,39
4	L		22.24



|--|







COLOR	White
ASPECT	Matt
DILUTION	Water (15-20%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
PERFORMANCE	8-11 m <sup>2</sup> /L

### Matt BLANCO POLAR

It is a high-performance acrylic paint with great covering power, performance and wash ability.



<b>14 L</b> aprox. 22 kg.	57,52
8 L	34,92
4 L	18,20
60 ml	5,35

COLOR	White
ASPECT	Matt
DILUTION	Water (10-15%)
APPLICATION	Brush, roller o painting gun
NATURE	Acrylic
DEDECORMANICE	7 10 102/1









6



### Matt ODISEA PRO

Exterior/Interior

Acrylic paint with an excellent covering power, high whiteness and wash ability. Ideal for interior decoration of houses.



White

Acrylic

7-10 m<sup>2</sup>/l.

Water (10-15%)



COLOR

**ASPECT** 

DILUTION

<b>14 L</b> aprox. 22 kg.	66,57
8 L	40,18
4 L	20,44
0 ml	5,70

Brush, roller or painting gun













## Matt SPECIAL FOR PLADUR

Exterior/Interior

High-quality waterborne matt paint with really high whiteness, hardness and covering power. Long-lasting white finishes. It contains additives that provide the product a great adherence to plasterboards (Pladur type). Fast drying.









COLOR	White
ASPECT	Matt
DILUTION	Water (10-15%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
PERFORMANCE	7-10 m²/l.













### Amacryl **AROMAS**

Exterior/Interior

Waterborne paint with excellent resistance, great covering power ans high performance. It contains fragances of tropical fruits. It contains anti-mold preservative.





I → L aprox. 22 kg.	70,22
8 L	42,20
4 L	21,45
750 ml	5,80







COLOR	White
ASPECT	Matt
DILUTION	Water (10-15%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
PERFORMANCE	8-11 m²/l.

### Matt OLIMPO

#### Exterior/Interior

Waterborne paint suitable for works where a great quality-price relationship is required. Great covering power over dark surfaces.

14 L aprox. 22 kg.

















54,63



### Matt **DINAMIC**

Interior/Exterior

Waterborne paint suitable for protection and decoration of both interior and exterior walls, with great covering power and good brush ability.

White

Matt

Acrylic

7-10 m2/l.

Water (10-15%)

Brush, roller or painting gun





COLOR

ASPECT

DILUTION

APPLICATION

PERFORMANCE

<b>14 L</b> aprox. 22 kg.	46,00
8 L	26,89
4 L	14,30
750 ml	4,48



7'1	





### Matt HABANA

White

Acrylic

7-10 m2/l.

COLOR

ASPECT

DILUTION

NATURE

APPLICATION

PERFORMANCE

Interior

Waterbone white paint suitable for working over bad-attached materials, Ideal for low-cost works,



13	L	aprox. 20 kg.	32,05
4	L		12.29

COLOR	Blanco
ASPECT	Mate
DILUTION	Agua (8-10%)
APPLICATION	Brocha, Rodillo, Pistola
NATURE	Acrílica
PERFORMANCE	7-9 m <sup>2</sup> /l













### Plastic Matt RUTA 66/Interior

Acrylic paint, suitable for low-cost works over interior surfaces. Great whiteness and covering power.



13	L	aprox. 20 kg.	29,51
4	L		11,11

COLOR	White
ASPECT	Matt
DILUTION	Water (8-10%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
PERFORMANCE	7-9 m²/l.









## Plastic Matt RUTA 66/Exterior

Waterborne paint suitable for low-cost works over either interior or exterior surfaces. Great whiteness and covering power.







OLOR	White
SPECT	Matt
ILUTION	Water (8-10%)
PPLICATION	Brush, roller or painting gun
ATURE	Acrylic
ERFORMANCE	8-10 m <sup>2</sup> /l.





### Matt ECOLOGICO/Odorless

Exterior/Interior

Odorless and environmentally friendly paint, with matt finish. Suitable for works in hospitals, restaurants and other public places.





<b>14</b> L aprox. 22 kg.	76,22
4 L	25.02

COLOR	White	
ASPECT	Matt	
DILUTION	Water (10-15%)	
APPLICATION	Brush, roller or painting gun	
NATURE	URE Acrylic	
PERFORMANCE	8-11 m²/l.	














- Without smell.



10 g/L	1,33	g/L
0 a 30 g/L		
31 a 75 g/L		
76 a 100 g/L		
101 a 150 g/L		
151 a 200 g/L		
201 a 300 g/L		
301 a 450 g/L		
> 451 g/L	W.	

## Acrylic PICADO GOTEABLE

Exterior/Interior

Waterborne paint with which we can carry out works in relief: stippled paint, droplet, textured walls, etc. Apply it by using a droplet machine or an appropriate paint roller.



14 L.	58,78
4 L	18,35

COLOR	White
ASPECT	Matt
DILUTION	Water (2-5%)
APPLICATION	Roller or machine to apply textured walls
NATURE	Acrylic
PERFORMANCE	1,5-3 m²/l.













## COATING MAXIMO with anti-mold preservative Exterior/Interior

Matt-finish smooth coating with anti-mold preservative. It contains large amounts of acrylic emulsions that endow the product with great strength and resistance. Uses: over surfaces of concrete, cement, plaster, mortar on facades, courtvards, etc.



14 L	aprox. 22 kg.	68,06
4 L		21.35

COLOR	White
ASPECT	Matt
DILUTION	Water (15-20%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
DEDECORATANICE	0.44 2/1













MATT SEDOSO with anti-mold preservative Exterior/Interior

Acrylic matt paint of silky finish, with anti-mold preservative, appropriate for quality works. Outstanding performance, leveling and resistance. Excellent wash ability. Uses: interior or exterior walls of plaster, cement, concrete, brick, etc.











93,06

29,34



	]\
[[/	1///
Ę	







COLOR	White
ASPECT	Silky matt
DILUTION	Water (10-15%)
APPLICATION	Brush, roller o painting gun
NATURE	Vinyl
PERFORMANCE	8-11 m²/l.

14 L aprox. 22 kg.



Acrylic vinyl paint with anti-mold preservative, suitable for high-quality works. Excellent whiteness, covering and leveling. Uses: interior or exterior walls of plaster, cement, concrete, brick, etc.













′ Ö\'
Ew.







14 L	aprox. 22 kg.	74,25
4 L		23,21

COLOR	White
ASPECT	Semi matt
DILUTION	Water (10-15%)
APPLICATION	Brush, roller or painting gun
NATURE	Vinyl
PERFORMANCE	8-11 m <sup>2</sup> /l.

#### Satin SEDA

#### Exterior/Interior

Acrylic vinyl paint with satin finish, excellent covering. Special for covering textured paints.



13 L	86,96
8 L	55,85
4 L	28,16

COLOR	White
ASPECT	Satin
DILUTION	Water (10-15%)
APPLICATION	Brush, roller or painting gun
NATURE	Vinyl
PERFORMANCE	10-13 m²/l.













### Satin OASIS

#### Exterior/Interior

Waterborne paint of soft shine, good covering and very smooth finishes.





COLOR ASPECT DILUTIO APPLICA

PERFORMANCE

13 L	73,62
8 L	47,32
4 L	23,89
50 ml	6,01



	Vill direction		T
	White	THE THE	
	Satin		
IN	Water (10-15%)		
ATION	Brush, roller or paint	ing gun	

Vinyl

9-12 m2/l.





### PLASTIC PAINT ALTO BRILLO

Acrylic vinyl paint. Due to its high content of resins and titanium dioxide, this paint shows high gloss and a great covering power.





13 L	103,04
4 L	31,95



13	L	103,04
4	L	31,95



OLOR	White
ASPECT	High gloss
DILUTION	Water (10-15%)
APPLICATION	Brush, roller or painting gun
NATURE	Vinyl
PEDECODMANICE	10.12 m <sup>2</sup> /l







### **HIDROSATIN**


#### Exterior/Interior

Acrylic satin paint in a wide variety of colors, easy to apply. High weathering resistance. Easy to clean. Pentrating colors that not degrade over time. Ideal for outdoors advertisements and handicrafts.





4 L	37,54	
50 ml	10,50	










6





#### Color chart\*

These colors are indicative

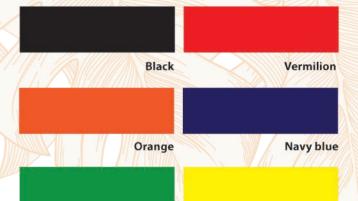

Grass green

Lemon yellow

# Plastic Paint NEGRO MATE

Acrylic matt paint in black color, ideal for decoration.





<b>14</b> L aprox. 22 kg.	75,90
4 L	23,47
50 ml	5,94

COLOR	Black
ASPECT	Matt
DILUTION	Water (10-15%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
DEDECORATION	7 40 2/1









6





Red alive

### TINTAMAR - Waterborne dye

Concentrated dye, to stain all kinds of waterborne paints. Great resistance to interior and exterior light.

14,54

No Page			
	1 KG 6	250 gr 9	50 gr
Ocher Ocher	13,92	4,95	2,16
Black	13,92	4,95	2,16
Rust red		4,95	2,16
Brown		4,95	2,16
Blue		10,83	3,72
Green		10,83	3,72
Orange		10,83	3,72
Yellow		10,83	3,72
Violet		10,83	3,72







4.64

### Smooth coating REVESPIN

Smooth coating highly resistant to friction and rainwater. Special for facades. Water repellent.



<b>14 L</b> aprox. 22 kg	65,00
8 L	38,76
4 L	20,24

COLOR	White	
ASPECT	Matt	
DILUTION	Water (10-15%)	
APPLICATION	Brush, roller or painting gun	
NATURE	Acrylic	
DEDECORATION	7.0 2/1	











### Smooth Coating INDUSTRIAL

Acrylic smooth coating with matt finish ideal for outdoor building works, where low cost is required. Water repellent.





COLO ASPE DILU APPL

PERFORMANCE

14	1	aprox. 22 kg.	53,74
4	L	1	16.90

OR	White
ECT	Matt
ITION	Water (10-15%)
LICATION	Brush, roller or painting gun
IDE	Acrelia

7-9 m<sup>2</sup>/l.











# Anti-crack Elastomer COATING

Elastic smooth coating ideal for facades prone to become damp. The high amount of emulsions contained in this coating form an elastic film that penetrates into the cracks, repelling water.





14 L	80,18
4 L	24,49

COLOR	White
ASPECT	Semi-matt
DILUTION	Water (10-15%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
PERFORMANCE	8-10 m <sup>2</sup> /l.
















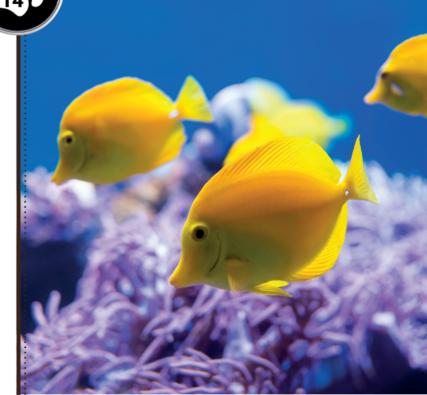

### SMOOTH COATING TRIPOL/Colors

It is an acrylic matt-finish coating ideal for outdoor works, due to the great amount of acrylic emulsions and special additives that withstand extreme weather. Available in a range of colors. It contains anti-mold preservative.

























COLOR ASPECT DILUTION APPLICATION NATURE

With and color chart Matt Water (15-20%) Brush, roller or painting gun 8-10 m2/l.

Increase on request:
Light colors6,00
Increase on request:
Dark colors9,80
Increase on request:
Special colorsConsult

			14 L.	4 L.	750 ml
Nº 1		White	73,90	21,94	
Nº 2		Ivory	79,45	23,34	
Nº 3		Vanilla	79,45	23,34	
Nº 4		Cream	79,45	23,34	
Nº 5		Dune	79,45	23,34	
Nº 6	7	Salmon	79,45	23,34	
Nº 7		Arcilla	79,45	23,34	
№ 8		Clay	79,45	23,34	
№ 9		Land	79,45	23,34	
Nº 10		Suede	79,45	23,34	
Nº 11		Brown	79,45	23,34	
Nº 12		Terracotta	79,45	23,34	
Nº 13		Sand	79,45	23,34	
Nº 14		Stone	79,45	23,34	
Nº 15		Roof tile	79,45	23,34	
Nº 16		Albero	79,45	23,34	6,16
Nº 17		Blue	95,34	29,39	6,96
Nº 18		Rust red	79,45	23,34	



### Smooth Coating RUTA 66

Acrylic smooth coating with matt finish. Ideal for outdoor building works where a low cost is required.



13 L aprox. 20 kg.	40,20
41	14,61

COLOR	White	THE REPORT OF THE PARTY OF THE
ASPECT	Matt	
DILUTION	Water (5-10%)	///// - / // - ·
APPLICATION	Brush, roller or painting gun	-7//.==
NATURE	Acrylic-Styrene	Addison
PERFORMANCE	7-9 m <sup>2</sup> /l.	











### **ROUGH** Stony Coating

Rough stony coating made from marble powder and carbonate. Ideal for covering up outdoor imperfections. Apply it with an appropriate roller.





59,12 18,35











All I	
DLOR	White
SPECT	Rough matt
LUTION	Water (3-5%)
PPLICATION	Brush or roller
ATURE	Acrylic-Styrene
DECRMANCE	1 5-2 m <sup>2</sup> /l

22 Kg

6 Kg


### **SILICATE** Paint

Exterior/Interior

Mineral paint of maximum quality and durbaility. Its formula made from potassium silicate produces a chemical reaction with the base material, sticking the paint to the substrate. Appropriate for restoraton of monuments.







COLOR	White
ASPECT	Matt
DILUTION	Water (3-5%)
APPLICATION	Brush, roller or painting gun
NATURE	Potassic Silicate
PERFORMANCE	7-9 m <sup>2</sup> /l














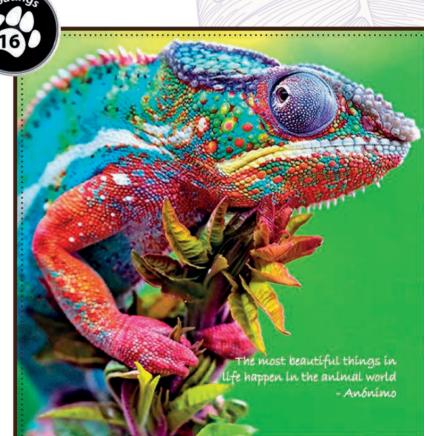

### **MONOLAYER** Paint

Interior/Exterior

High-hiding acrylic paint for decoration works, in pastel and light colors.





Colors 27,80
Magenta and purple 38,59

7,62 6 11,15 6

COLOR
ASPECT
DILUTION
APPLICATION
NATURE
PERFORMANCE

Color chart
Matt
Water (10-15%)
Brush, roller or painting gun
Acrylic
8-10 m²/l.

#### Color Chart\*

These colors are indicative





122 - Serene gray

136 - Curry

124 - Magenta

138 - Purple

126 - Aloe Vera

142 - Saffron flower

128 - Tiramisu

144 - Jeans

130 - Full moon



132 - Almond

152 - Slate gray



#### **BLUE CHLORINATED** RUBBER

Paint for pools and floors Exterior/Interior

Ideal for painting pools, floors and sports courts made from concrete and cement. Wait several days before filling the pool, in order to let the surface dry perfectly. It serves to renew old and damaged floors. It can be washed even with hot water.







COLOR Blue ASPECT Semi-gloss Solvent (5-10%) DILUTION Brush, roller or painting gun Chlorinated rubber PERFORMANCE 6-8 m<sup>2</sup>/l.



### **NON-SLIP** Additive

Product in powdered form used to convert the paint into non-lip. It can be directly mixed or be sprinkle over the paint while it is still wet. When the paint is dry we must apply another coat of paint over the non-slip additive.



22.43 25 Kg

COLOR	Gamuza (colorless once dry)
ASPECT	Sandy
MIXED WITH PAINT	80-100 gr. per kilogram of paint
DUSTING	6-8 m²/kg.



# WATERBORNE POOL Paint with algaecide ADDITIVE Exterior/Interior

Waterborne pool paint with algaecide additive. Ideal for painting swimming pools made from concrete or cement. When the surface is painted, wait at least 3 or 4 days before filling the pool with water.



20 Kg	69,13
5 Kg	19,11



COLOR	Blue	
ASPECT	Matt	
DILUTION	Water (5-10%)	- 3
APPLICATION	Brush, roller or painting gun	
NATURE	Acrylic	
FREGRETATION	7.02/1	





It does not alter the original color of the paint once mixed

### Paint RED TENNIS

AMARTO

DEPORT

COLOR ASPECT DILUTION APPLICATION NATURE PERFORMANCE

#### Exterior/Interior

Acrylic paint for maintenance and refurbishing of sport pitches, ramps, flights of stairs, etc. Non-slip additive can be added when needed, either mixed with the paint or sprinkled over it.




















Red	Contract Contract	100000000000000000000000000000000000000
Semi-matt	SWE SELECT	1.000 (1.
Water (10-15%)		
Brush, roller or pa	inting gun	
Acrylic		Mile diese
8-10 m <sup>2</sup> /l.	n seniolohia	

## Paint GREEN FRONTON TENNIS Exterior/Into

Acrylic paint for maintenance and refurbishing of sport pitches, ramps, flights of stairs, etc. Non-slip additive can be added when needed, either mixed with the paint or sprinkled over it.





14	L	98,98
4	L	28.97

COLOR	Green
ASPECT	Semi-matt Semi-matt
DILUTION	Water (10-15%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
DEDECIDADANCE	9-10 m <sup>2</sup> /l











### Paint **SPORT BLUE**

#### Exterior/Interior

Acrylic paint for maintenance and refurbishing of sport pitches, ramps, flights of stairs, etc. Non-slip additive can be added when needed, either mixed with the paint or sprinkled over it.






14	L	98,98
4	L	28,97



COLOR	Blue
ASPECT	Semi-matt
DILUTION	Water (10-15%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
PERFORMANCE	8-10 m²/l.





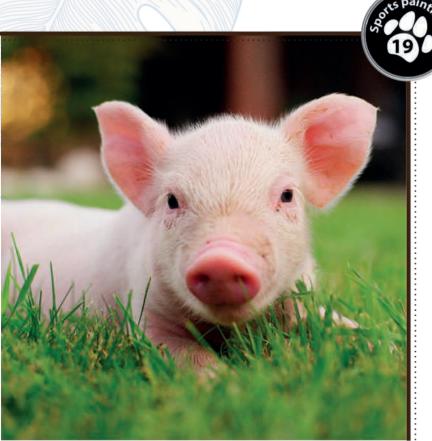

### Tintometric SYSTEM TECNIMAC

Interior/Exterior

Special dyes for tintometric system tecnimac.
Universal dyes suitable for tinting either waterborne or solventborne paints.
















X-SMART automatic paint dispenser

X-PROTINT automatic paint dispenser

A2 Colibri

GA480 automatic mixer



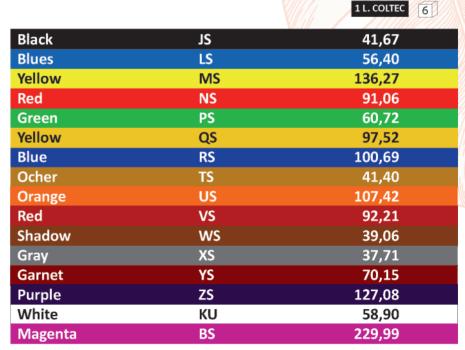







#### Base Plastic Paint MATT

Exterior/Interior

Acrylic matt paint to be dyed with the tintometric tinting system TECNIMAC, obtaining quickly and easily any color as desired.




















White-P

86.16

28,21

6,92

Brush, roller or painting gun

Water (10-15%)

Medium-D

73,03

56,51 48,51 43,80

24,50

6.13

Base Plastic Paint SATIN

13 L

8 L

4 L

Satin

Vinyl

10-13 m<sup>2</sup>/l.

750 ml

ASPECT

DILUTION APPLICATION

PERFORMANCE



Exterior/Interior

71,27

22,66

5,80


















ASPECT	Matt
DILUTION	Water (10-15%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
PERFORMANCE	9-11 m²/l.

### **Base FAÇADE COATING**

Exterior/Interior

Façade coating to be dyed with the tintometric tinting system TECNIMAC, obtaining quickly and easily any color as desired.


















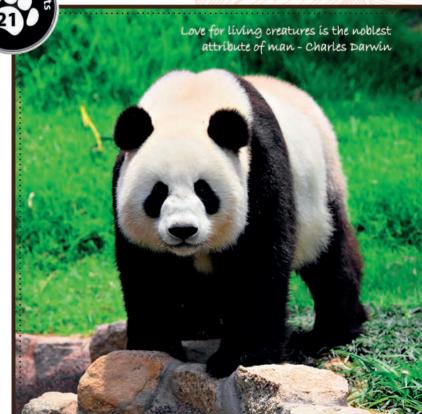



White-P Medium-D 77,89 73,27 54,10 14 L 24,96 23,36 17,78

ASPECT	Matt
DILUTION	Water (10-15%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
DEDECRMANCE	0-11 m <sup>2</sup> /l

### Waterborne BASE ENAMEL

GLOSS WITH POLYURETHANE

Acrylic glossy enamel suitable for obtaining any color of tintometric tinting system TECNIMAC. Apply over surfaces of wood, iron, steel, plaster, cement, etc. previously primed.











4 L	71,90	66,00	58,63
750 ml	16,51	15,16	13,46



	F	7
1	U	_

ASPECT	Glossy
DILUTION	Water (2-5%)
APPLICATION	Brush, roller or painting gun
NATURE	Pure Acrylic + Polyurethane
PERFORMANCE	13-15 m²/l





## Waterborne BASE ENAMEL

Acrylic satin enamel suitable for obtaining color of tintometric tinting system TECNIMAC. Apply over surfaces of wood, iron, steel, plaster, cement, etc. previously primed.



STT




ASPECT

DILUTION APPLICATION

NATURE

White	Medium	TR
ТШИТЬ 2	111111	E0 60



Brush, roller or painting gun

Pure Acrylic + Polyurethane

Satin Water (2-5%)

13-15 m<sup>2</sup>/l.









#### Waterborne BASE ENAMEL MATT

Exterior/Interior



Acrylic matt enamel suitable for obtaining any color of tintometric tinting system TECNIMAC. Apply over surfaces of wood, iron, steel, plaster, cement, etc. previously primed.

White
















Medium



F		
1	- 1	

#### Waterborne LASUR IMPREGNATION **BASE**

Exterior/Interior

Waterborne matt impregnating product, suitable for obtaining any wood color of tintometric tinting system TECNI-MAC. Waterborne colorless lasur to be applied over open-pored surfaces. Endowed with additives to protect wood against tannins, UV rays and moisture.



4 L	51,31	2
750 ml	11,28	6



COLOR	Colorless	
ASPECT	Matt	
DILUTION	Ready-to-use or water (2%)	
APPLICATION	Brush, roller or painting gun	
NATURE	Acrylic	
PERFORMANCE	14-16 m <sup>2</sup> /l	





ASPECT	Matt
DILUTION	Water (2-5%)
APPLICATION	Brush, roller or painting gun
NATURE	Pure Acrylic + Polyurethane
PERFORMANCE	13-15 m²/l.



### Synthetic Enamel BASE GLOSS

Solvent-based glossy enamel to be dyed with tintometric tinting system TECNIMAC, obtaining any color as desired. This product stands out for its brush ability, hardness and covering power. High weather resistance. Apply over surfaces of wood, iron, steel, plaster, cement, etc.

White-P

4 L

Glossy

Synthetic

13-15 m2/l.

Solvent (5-10%)

Brush, roller or painting gun

750 ml

ASPECT

DILUTION

NATURE

PERFORMANCE

Medium-D

15 L 253,30 232,52 179,58


















### Synthetic Enamel BASE SATIN



Solvent-based satin enamel to be dyed with tintometric tinting system TECNIMAC, obtaining any color as desired. This product stands out for its brush ability, hardness and covering power. High weather resistance. Apply over surfaces of wood, iron, steel, plaster, cement, etc.





ASPECT

750 ml

Satin


Synthetic

13-15 m2/l.

Solvent (5-10%)

	White-P	Medium-D	TR
15 L	247,30	232,58	209,16
4 L	72.67	68.65	62.01

Brush, roller or painting gun













All animals are equal, but some are more equal than others. - George Orwell


### **BONDING INTERPHASE**

This product acts as an adhesive layer, easing the adhesion of cement-based materials over non-absorbent carrier materials.



COLOR

15 Kg	79,33	
5 Kg	28,61	
1 Kg	7,62	6











### Vinyl GLUE

Exterior/Interior

Ready-to-use vinyl glue ideal for gluing components, wallpapers, as well as for handicrafts.



750 gr	7,75	6
250 gr	4,20	6



ASPECT	Glossy
DILUTION	Ready-to-use or water
APPLICATION	Brush, roller, manually
NATURE	Polyvinyl acetate
	0.44.520





### Latex KILL 1202

100% latex concentrated

Exterior/Interior

Suitable for preparing materials to be worked, strengthering plaster and painting works, as well as brightening them.



87,45
38,65
8,52 6

COLOR	Colorless
ASPECT	Glossy liquid
DILUTION	One part of product per 5/6 parts of water
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
PERFORMANCE	12-15 m <sup>2</sup> /l











## FIJATÍN wall fixer

100% concentrated

Exterior/Interior

Primer used for fixing and strengthening materials in bad condition. Special for fixing either new or old and dirty walls, just as lime surfaces. This product leaves a transparent semi-glossy film.



12 L	121,32
5 L	45,40
50 ml	10,90



6

COLOR	Colorless
ASPECT	Glossy liquid
DILUTION	One part of product per 5/6 parts of water
APPLICATION	Brush, roller or painting gun
NATURE	Pure Acrylic
PERFORMANCE	12-15 m²/l.





#### **CEMENT GLUE**

Interior/Exterior

Used for setting ceramic tiles over both vertical and horizontal surfaces: floor and wall tiles, terrazzo, stone, etc. Not suitable for setting pieces of porcelain stoneware, gresite pieces or similar.



1,5 Kg 3,63 12

White			
Powder		,,,	
30-35% wat	er		7.7. 7. 7.77
6 hours app			
3 mm			
0,6 kg/m <sup>2</sup>		112 2	





### **PLASTER**

Interio

Used for plastering masonry works, moldings and suspended plaster ceilings, mending decorative materials and handicrafts. Suitable for door and window frames, recessed electrical boxes, filled of wall holes or cracks, etc.



1 Kg

Depending on the support material

White

2 mm

Powder

25-30% water

**Fast-setting** 

2,87 12







### **GYPSUM**

COLOR

**ASPECT** 

DILUTION

LIFETIME

THICKNESS

PERFORMANCE

Interior

Used for plastering masonry works, fixing door and window frames, recessed electrical boxes, filled of wall holes or cracks and repairs in general.



1 Kg

COLOR	White
ASPECT	Powder
DILUTION	25-30% water
LIFETIME	30 min. aprox.
THICKNESS	2 mm
PERFORMANCE	1,60 kg/m <sup>2</sup>





#### **CEMENT**

COLOR

**ASPECT** 

DILUTION

THICKNESS

Interior/Exterior

Used for plastering masonry works, repairs in walls and floors both interior and exterior. Do not use over plaster, wood or other non-porous surfaces.



1,5 Kg

4,55





COLOR	White
ASPECT	Powder
DILUTION	20-30% water
LIFETIME	90 minutes approximately
THICKNESS	2 mm
DEDECRIMANICE	1 50 kg/m²

### Waterproofing paint A-100

Paint made from elastic resins used to avoid problems of dampness, leaks and cracks. Wash able. Advisable to apply 2 or 3 coats of product.



	COLORS	
14 L	63,70	
4 L	19,80	
750 ml	6,45	
	GREEN *	
14 L	72,28	
4 L	22,49	
750 ml	6,95	1

Gray
Green
White / Red /Roof tile / Gray / Green
Viscous
Ready-to-use or water (5%)
Brush, roller or painting gun
Brush, roller or painting gun Acrylic














### Waterproofing paint PLUS

Elastic passable paint used to waterproof any kind of porous surface with leaking and filtration problems. It can be applied alone or over fiberglass reinforcement in order to obtain a better protection. Advisable to apply 2 or 3 coats of product.



14 L	88,46
4 L	27,88

	750 ml	7,10
•	750 ml only available in	Plus TR



COLOR	White / Red / Transparent / Roof tile
ASPECT	Viscous
DILUTION	Ready-to-use or water (5%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
PERFORMANCE	1.5-3 m <sup>2</sup> /l.













## Waterproofing paint FIBRA

Waterproofing paint in blends with fiber ideal for waterproofing surfaces as terraces or roofs. Due to its fiber component, this product avoids having to use fiberglass reinforcement in works of waterproofing.



14 L	70,63	
4 L	22,30	
750 ml	5,89	5





COLOR	White/ Red
ASPECT	Viscous
DILUTION	Ready-to-use or water (5%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
PERFORMANCE	1,5-3 m²/l.













#### **GLASS MESH**

Glass mesh appropriate for reinforcing in waterproofing works on terraces and roofs, avoiding the formation of cracks and fissures. It serves as reinforcing of mortars and cements.



Dimensions	Price
50 m <sup>2</sup>	58,78
Und/Box 6	

**DIMENSIONS** 

50 meters length and 100 cm wide

#### **FIBERGLASS**

Fiberglass used to reinforce paint in waterproofing works, avoiding the formation of cracks and fissures. It serves to avoid cracks, obtaining smooth walls and ceilings.



DIMENSIONS

50 meters length and 100 cm wide

### MAT 300 grs./m

Blanket made of fiberglass cut threads. Appropriate for waterproofing, builsing of structural laminated works (automotive sector, industry, pools), as well as polyester resin molds.

### MAT 300grs./m



Dimensions	Price	
1 mt	5,07	25
5 mt	22,49	10

### **Poliester RESIN KIT**

High reactivity polyester resin, to be used over any kind of surface: steel, wood and concrete. For building molds and modeling works, pipes, boilers, boats, etc.



Kit 1 Kg 20,98 6

Domestic use Content: Thixotropic accelerated polyester resin (1Kg) Catalyzer (20 grs.) 0,25m mat 300 grs./m

## Piter Plast RENOVATION - Powder

Filler powder ideal for plastering textured walls, leveling damaged walls or filling holes over porous surfaces. It can be easily sanded. It can be applied over acrylic paints.



15 Kg	24,42	
5 Kg	12,34	4

1	COLOR	White
1	ASPECT	Powder
	DILUTION	400-450 ml of water per kilogram
	APPLICATION	Trowel or spatula
	THICKNESS	8 mm
7	PERFORMANCE	0.5-0.7 m <sup>2</sup> /kg





### Piter Plast STANDARD

Interior

Filler powder ideal for filling small damages, holes or cracks over interior surfaces of plaster, cement, temple or acrylic paints.



15 Kg	22,28	
5 Kg	9,55	1
1 Kg	2,64 2	0

COLOR	White
ASPECT	Powder
DILUTION	380-400 ml of water per kilogram
APPLICATION	Trowel or spatula
THICKNESS	1 mm
PERFORMANCE	1-1,3 m <sup>2</sup> /kg.





### Piter Plast SMOOTH FINISH

Interio

Filler powder ideal for filling small damages, holes or cracks over interior surfaces of plaster, cement, temple or acrylic paints. It allows for very smooth and fine results applied over Piter Plast Renovation.



15 Kg 29,17

COLOR	White
ASPECT	Powder
DILUTION	380-400 ml of water per kilogram
APPLICATION	Trowel or spatula
THICKNESS	1 mm
PERFORMANCE	1-1,3 m <sup>2</sup> /kg.





# Piter Plast REPARATION OF FAÇADES

Filler powder for exterior works, ideal for mending cracks and holes on façades. Used for mending balustrades or any exterior building works.



15 Kg	45,72
5 Kg	19,21 4
1 Kg	4,77 20

COLOR	White
ASPECTO	Powder
ASPECTO	Powder
DILUTION	400-420 ml of water per kilogram
APPLICATION	Trowel or spatula
APPLICATION	Trower or spatula
THICKNESS	10 mm
PERFORMANCE	0,75-0,8 m <sup>2</sup> /kg.
PERFORIVIAIVE	0,73-0,6 III / kg.





## Ready-to-use PITER PLAST - Exterior

This putty can be applied by using a trowel or a spatula. Used to filling and leveling holes, cracks or damages on cement, plaster, concrete, wood, etc.



5 Kg	13,84	4
1 Kg	4,69	12

COLOR	White
ASPECT	Pasty
DILUTION	Ready-to-use product
APPLICATION	Trowel or spatula
THICKNESS	1 mm
PERFORMANCE	1.75-2 m <sup>2</sup> /kg.





## Ready-to-use PITER PLAST - Interior

This putty can be applied by using a trowel or a spatula. Used to filling and leveling holes, cracks or damages on cement, plaster, concrete, wood, etc. Ready-to-use product. Close firmly the can. It can be easily sanded.



20 Kg	40,59
5 Kg	11,93 4
1 Kg	4,05 12
350 gr	2,81 27

COLOR	White
ASPECT	Pasty
DILUTION	Ready-to-use product
APPLICATION	Trowel or spatula
THICKNESS	1 mm
PERFORMANCE	1,75 - 2 m²/kg.





## Ready-to-use PITER PLAST FIBRA Exterior/Interior

Acrylic putty reinforced with fiberglass. Used to fill and mend cracks and fissures on both interior and exterior surfaces of plaster, cement, temple or paint.



5	Kg	55,58	4
1	Kg	12,77	12

COLOR	White
ASPECT	Pasty
DILUTION	Ready-to-use product
APPLICATION	Trowel or spatula
THICKNESS	1 mm
PERFORMANCE	1,75-2 m <sup>2</sup> /kg.





The eyes of an animal have the power to speak great languaje - Martin Buber



## WATERBORNE ENAMEL

acrylic enamel

WITH POLYURETHANE



#### Exterior/Interior



Maximum quality waterborne enamel, to decorate and protect all kinds of surfaces of wood, steel, iron, plaster, cement, etc. in both interior and exterior. It contains polyurethane.



Carta Color \*

71.92

750 ml.

16.52

375 ml. 8.11


Pearl Gray



COLOR	Carta de Colores*
ASPECT	Brillante
DILUTION	Agua (2-5%)
APPLICATION	Brocha, rodillo, pistola
NATURE	Acrílica Pura + PU
PERFORMANCE	13-15 m²/l.



#### Color Chart\*





Brown

#### **Properties**

Quick drying, high quality and elasticity, washable, great adherence, U.V. ray resistance, not vellowing, high resistance.

#### Application surfaces

Iron, steel, wood, canvas, rigid PVC, methacrylate, expanded polystyrene, plaster, cement, fibrocement, brick, stone, porous ceramics, galvanized aluminium, copper, zinc, etc.

#### Main uses

Doors, windows, balconies, fences, household appliances, canvas, cranes, metallic structures, radiators, garden and interior furniture.

#### Instructions

Shake well the product by using a manueal shaker. Surface to paint must be free from dust, wax, oil, rust or detached paint. It can be applied with brush, roller or painting gun. To apply with a roller or brush, diluting the product is not necessary. To apply by using a painting gun, dilute one part of product with 5-10 parts of water.

#### New surfaces

Wood, plaster, gypsum, cement: primer beforehand with an acrylic or synthetic sealer.

Iron or steel: apply beforehand an antirust primer either acrylic or synthetic.

Galvanized steel, aluminium, zinc or other non-porous surfaces: Prime with wither acrylic or synthetic multipurpose primer (Shop Primer).

Apply two coats of acrylic enamel over previously prepared surfaces.

#### Paintes surfaces in good condition

Sand it smoothly in order to obtain a better adherence and clean the dust. Then, apply one or two coats of acrylic enamel.

#### Surfaces in bad condition

Remove the detached paint. Then, we will proceed as indicated for painted surfaces in good condition.



#### WATERBORNE ENAMEL GLOSS

#### WITH POLYURETHANE

Black

71,92

16,52

Maximum quality waterborne enamel, to decorate and protect all kinds of surfaces of wood, steel, iron, plaster, cement, etc. in both interior and exterior. It contains polyurethane.





















Brush, roller or painting gun

Pure Acrylic + Polyurethane

White / Black

13-15 m<sup>2</sup>/l.

Satin Water (2-5%)

WATERBORNE ENAMEL SATIN

Maximum quality waterborne enamel, to decorate and

protect all kinds of surfaces of wood, steel, iron, plaster,

cement, etc. in both interior and exterior.

WITH POLYURETHANE

COLOR

**ASPECT** 

DILUTION APLICATION

NATURE

PERFORMANCE

It contains polyurethane.







	375 ml	8,11	8,11	8
COLOR	White/Black			
ASPECT	Gloosy			
DILUTION	Water (2-5%)			
APPLICATION	Brush, roller or	painting gun	1	-

Pure Acrylic + Polyurethane

13-15 m<sup>2</sup>/l.

750 ml

White

71,92

16,52

#### WATERBORNE ENAMEL MATT

#### WITH POLYURETHANE

PERFORMANCE


Exterior/Interior

Maximum quality waterborne enamel, to decorate and protect all kinds of surfaces of wood, steel, iron, plaster, cement, etc. in both interior and exterior. It contains polyurethane.










COLOR	White/Black
ASPECT	Matt
DILUTION	Water (2-5%)
APPLICATION	Brush, roller or painting gun
NATURE	Pure Acrylic + Polyurethane
PERFORMANCE	13-15 m <sup>2</sup> /L





NO OXID

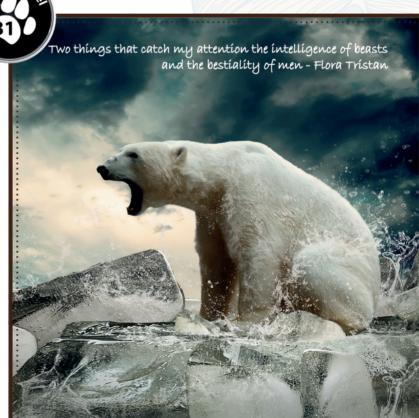

### SYNTHETIC ENAMEL AMAREL GLOSS

#### Exterior/Interior

Quick-drying synthetic enamel, good color fixing. Suitable for protecting all kinds of metallic surfaces, wood, gypsum, etc. (Doors, furniture, vehicles, walls, machinery).





	White	Black
4 L	59,21	51,12
750 ml	13,37	11,78
375 ml	8,00	7,28





COLOR	White/Black
ASPECT	Glossy
DILUTION	Solvent (5-10%)
APPLICATION	Brush, roller or painting gun
NATURE	Synthetic
PERFORMANCE	14-16 m²/l.





### SYNTHETIC ENAMEL AMAREL SATIN

#### Exterior/Interior

Quick-drying synthetic enamel, good color fixing. Suitable for protecting all kinds of metallic surfaces, wood, gypsum, etc. (Doors, furniture, vehicles, walls, machinery).





	White	Black	
4 L	65,81	47,85	2
750 ml	14,61	11,25	6
375 ml	8,60	6,94	8



COLOR	White/Black
ASPECT	Satin
DILUTION	Solvent (5-10%)
APPLICATION	Brush, roller or painting gun
NATURE	Synthetic
PERFORMANCE	14-16 m <sup>2</sup> /L





### SYNTHETIC ENAMEL AMAREL MATT

#### Exterior/Interior

Quick-drying enamel, good color fixing. Suitable for protecting all kinds of metallic surfaces, wood, gypsum, etc. (Doors, furniture, vehicles, walls, machinery).







	white	DIACK	
4 L	65,81	49,60	2
750 ml	14,61	11,54	6
375 ml	8,60	7,11	8

White

COLOR	White/Black
ASPECT	Matt
DILUTION	Solvent (5-10%)
APPLICATION	Brush, roller or painting gun
NATURE	Synthetic
DEDECORMANCE	11 16 m <sup>2</sup> /I













# Synthetic enamel AMAREL GLOSS

Quick-drying synthetic enamel, good color fixing. Suitable for protecting all kinds of metallic surfaces, wood, gypsum, etc. (Doors, furniture, vehicles, walls, machinery).

Synthetic

14-16 m<sup>2</sup>/l.











Color Chart*
Solvent (5-10%)
Brush, roller, or painting gun
Cunthotic





COLOR

DILUTION APPLICATION

NATURE

PERFORMANCE

Royal yellow / May green /

111/1.		
4 L. 2	750 ml 6	375 ml 8
51,32	11,88	7,28
V/////	///	
56,49	12,85	7,75
		/ <b>/</b>
65,35	14,47	8,60
		-
	4 L. 2 51,32	4 L. 2 750 ml 6 51,32 11,88

### WHITE Sealer

#### Exterior/Interior

Synthetic primer to prepare surfaces of wood, gypsum, metal, as well as all kinds of porous surfaces. Excellent adherence and covering power.



COLOR	White
ASPECT	Matt
DILUTION	Solvent (5-10%)
APPLICATION	Brush, roller or painting gun
NATURE	Synthetic
PERFORMANCE	7-9 m²/l.











### Shop PRIMER - Multipurpose

One-component adherent primer suitable for all kinds of non-porous materials or bad attached to building surfaces. Special for aluminium, galvanized steel, zinc, ceramic tiles, wooden platforms, etc. It can be repainted with all kinds of acrylic paints, enamels, lacquers, etc.



4 L	66,16	2
750 ml	14,65	6



COLOR	White
ASPECT	Semi-matt Semi-matt
DILUTION	Solvent (5-10%)
APPLICATION	Brush, roller or painting gun
NATURE	Synthetic
PEDECODAAANCE	0.102/1





### WHITE Minium

#### Exterior/Interior

Antioxidant primer used to prime metallic surfaces, protecting them against rust, before applying a finish coat of enamel. Serves to protect metallic beams, fences and cellars, doors, bridges, lampposts, etc.



4 L	43,43 2
750 ml	10,84 6
375 ml	6,56

COLOR	White
ASPECT	Semi-matt
DILUTION	Solvent (5-10%)
APPLICATION	Brush, roller or painting gun
NATURE	Alkyd synthetic
PERFORMANCE	6-8 m²/l.













### **ORANGE Minium**

#### Exterior/Interior

Antioxidant primer used to prime metallic surfaces, protecting them against rust, before applying a finish coat of enamel. Serves to protect metallic beams, fences and cellars, doors, bridges, lampposts, etc.



4 L	<b>52,24</b> 2	
750 ml	<b>12,24</b> 6	
375 ml	<b>7,35</b> 8	ĺ



COLOR	Orange
ASPECT	Semi-matt Semi-matt
DILUTION	Solvent (5-10%)
APPLICATION	Brush, roller or painting gun
NATURE	Alkyd synthetic
PERFORMANCE	6-8 m <sup>2</sup> /l.





### Granular OXI-MAR

#### forge effect

COLOR

**ASPECT** 

DILUTION

NATURE

**APPLICATION** 

**PERFORMANCE** 

#### Exterior/Interior

80,27 2

6

18,95

Anticorrosive enamel with metallic aspect (forged). Appropriate for painting all kinds of metallic surfaces (cellars, fences, metallic doors, cranes, bridges, etc.) Prime the surface before applying this product.

4 L

Ready-to-use or solvent (3-5%)

Brush, roller or painting gun

750 ml

Color Chart \*

Granulated

Synthetic

6-8 m<sup>2</sup>/l.















### Micaceous OXI-MAR

#### forge effect

COLOR

**ASPECT** 

DILUTION

**NATURE** 

APPLICATION

PERFORMANCE

79,89 2

17,31 6

Perfectly smooth anticorrosive enamel with forge effect. Appropriate for painting all kinds of metallic surfaces (cellars, fences, machinery, metallic doors, etc).

4 L

Ready-to-use or solvent (3-5%)

Brush, roller or painting gun

750 ml

Color chart \*

Synthetic

6-8 m<sup>2</sup>/l.




















#### Color Chart\* These colors are indicative









**PEARL WHITE** 





**BLACK METAL** 

**ROCK GRAY** 

**BLUE MACHINERY** 





**COPPER BROWN** 

**VINTAGE GREEN** 



FERRO BLACK

**FORGE GRAY** 



**RUST BROWN** 

### ANTIHEAT BLACK PAINT 500° Exterior/Interior

Suitable for surfaces to withstand high temperatures: stoves, chimneys, barbecues, motors, pipes, smoke ducts, etc. Withstand 500°C without cracking.



750 ml	36,46	6
375 ml	19.87	8



COLOR	Black
ASPECT	Matt
DILUTION	Solvent (0-10%)
APPLICATION	Brush, roller or painting gun
NATURE	Synthetic
DEDECORMANICE	12-14 m <sup>2</sup> /l









### **RUST CONVERTER**

Product to be applied over rusted iron that cannot be cleaned. With this rust converter, we will obtain a really hard film perfectly attached to the surface, by means of a chemical reaction. Once dry, we can apply any kind of paint over it.







750 ml	27,68	6
		11







COLOR	Transparent
ASPECT	Semi-matt
DILUTION	Ready-to-use or water (2%)
APPLICATION	Brush, roller or painting gun
NATURE	Antioxidant
PERFORMANCE	15-20 m <sup>2</sup> /l.

#### TWO-COMPONENT WATERBORNE ENAMEL


Ceramic Aspect - Special for bathtubs

Two-component waterborne enamel of great strength, elasticity and outdoor resistance. High gloss. It serves to be applied on bathrooms and washrooms: bathubs, toilets, sinks, ceramic tiles,

heating radiators, as well as household appliances.







COLOR	White
ASPECT	High gloss
DILUTION	Water (3-5%)
APPLICATION	Brush, roller or painting gun
NATURE	Ероху
PERFORMANCE	12-14 m²/l.













## SYNTHETIC PRIMER

# AMARTO

**ASPECT** 

DILUTION

APPLICATION NATURE

PERFORMANCE

### Exterior/Interior

Anticorrosive synthetic primer, to be applied over all kind of surfaces of iron, steel or wood. It serves to primer metallic structures, machinery, etc.





	Red	Gray	White	
20 Kg	104,70	108,31	161,53	
5 Kg	29,59	30,49	43,81	1
1 Kg	8,13	8,31	10,95	

///	1///	5
		\\ \_ <u>®</u>
inting	gun	 N








## **ANTIDAMPNESS Stain Remover**

Solvent-base synthetic paint, to remove stains of dampness, smoke, grease, nicotine, etc., over building surfaces of cement, concrete, gypsum, stone, brick, etc. even when wet.











COLOR	White
ASPECT	Matt
DILUTION	Solvent (5-10%)
APPLICATION	Brush, roller or painting gun
NATURE	Synthetic
PERFORMANCE	7-9 m <sup>2</sup> /l







## **ALUMINIUM Enamel**

Semi-matt Solvent (10-15%)

Synthetic

5-8 m<sup>2</sup>/kg.

Brush, roller or pai

### Exterior/Interior

Enamel resistant to weather and high temperatures. Special for protecting metallic doors, cranes, heating radiators, fences and all kinds of metallic surfaces.



4 L	68,39 2
750 ml	17,47 6
375 ml	10,73 8

COLOR	Aluminium
ASPECT	Glossy
DILUTION	Ready-to-use or solvent (3-5%)
APPLICATION	Brush, roller or painting gun
NATURE	Synthetic
PERFORMANCE	7-9 m²/l.











## Enamel LACQUER Satin White

Highly resistant enamel-lacquer, easy to apply, silky finish. Suitable for heating radiators, furniture, windows, doors, shelves, etc.



COLO ASPE DILU APPI

PERFORMANCE







OR	White
ECT	Satin
ECI	
ITION	Solvent (5-10%)
LICATION	Brush, roller or painting gun
LICATION	brush, roller or painting guil

Polyurethane

12-15 m<sup>2</sup>/l.





## **SIGNALING Paint**

Matt

Solvent (5-15%)

Exterior/Interior

Solvent-based acrylic paint, fast drying. Special for signaling on concrete and asphalt pavements. Used to signaling pedestrian crossings, sports courts, parking spaces, etc. To achieve a shinig effect, we must springkle glass microsphereson the paint while in the tack state.



DILUTION

		F	
22	Kg	1	
5	Kg	-//	
1	Kg	7	

Brush, roller or painting gun

White 150,50 40,09 10,27















NATURE Acrylic solvent-based
PERFORMANCE 1,5-2 m²/kg.



Exterior/Interior

Glass microspheres to be sprinkled over signaling paint while in the tack state, reflecting the light emitted by car headlights.



25 Kg

73,72

FUNCTION RENDIMIENTO Endow the signaling paint with strength Sprinkled over not totally dry paint, we need about 300-500 grs of product per m<sup>2</sup> of painted surface





## Invisible HYDROFUGANT VARNISH

Invisible water-repellent varnish. Do not form film; do not alter the original coloring of the surface. Permeable to water, this product repels water, with great penetration power. Used to protect natural and artificial stone, brick, creamic tiles, polished concrete, etc. It avoids the apparition of mold and rust.



15 L	179,24	
4 L//	61,40	inii)
750 ml	13,91	6

LOR	Colorless
PECT	Liquid
LUTION	Ready-to-use product
PLICATION	Brush, roller or painting gun
TURE	Polysiloxane - Silane
DECORMANCE	10.20 m2/l









# Penetrating Varnish SPECIAL FAÇADES Exterior/Interior Exterior varnish of great resistance and waterproofing power.

Exterior varnish of great resistance and waterproofing power. Suitable for protecting walls of cement, concrete, stone, etc. leaving a satin transparent film over the surface.



15 L	162,21
4 L	46,26 2
750 ml	10.91 6

	* 111.11 AV A A A A A A A A A A A A A A A A A
COLOR	Colorless
ASPECT	Liquid
DILUTION	Solvent (5-15%)
APPLICATION	Brush, roller or painting gun
NATURE	Synthetic
DEDECORANNE	0.122/1













## **PORE-FILLING** Nitrocellulose lacquer primer Transparent protector lacquer for sealing and priming new or

to-restore wood. Transparent look and easy sanding. Quick drying. Used for priming windows, wood doors, furniture, wardrobes, wooden beams, etc.



4 L	53,27
50 ml	11.84



COLOR	Colorless
ASPECT	Matt
DILUTION	Solvent (5-15%)
APPLICATION	Brush, roller or painting gun
NATURE	Synthetic
DEDECRMANICE	14-16 m <sup>2</sup> /I









## Nitrocellulose Lacquer SATIN FINISH

Satin-finish finishing lacquer. It serves to restore or decorate all kinds of interior wooden surfaces previously primed with Nitrocellulose Lacquer Primer, Used for lacquering windowsm doors, furniture, wardrobes, wooden beams, etc.



		-61
4 L	61,75	2
750 ml	13,44	6



COLOR	Colores
ASPECT	Satin
DILUTION	Solvent (5-10%)
APPLICATION	Brush, roller or painting gun
NATURE	Synthetic
DEDECORMANICE	14 16 m <sup>2</sup> /l







Glossy solvent-borne polyurethane varnish. Its great hardness endows wooden materials with great durability and protection (wooden parquets, cork flooring, wooden staircases, bars, etc.)



4 L	85,79
750 ml	17.81



4 L	85,79	2
i0 ml	17,81	6



COLOR	Colorless
* CORCE	COTCUSTORY
ASPECT	Glossy
DILUTION	Solvent (5-10%)
211011011	
APPLICATION	Brush, roller or painting gun
NATURE	Polyurethane
WATURE	rolyurethane
PERFORMANCE	12-14 m <sup>2</sup> /l.







## Glossy MARINE VARNISH

Urethane varnish with U.V. filter. High resistance in marine environments, high mountain areas and materials exposed to sun. This varnish is ideal for protecting both bare and stained exterior wooden surfaces.



4 L	61,75	
750 ml	13,44 6	
375 ml	9,04 8	



COLOR	Colorless
ASPECT	Glossy
DILUTION	Solvent (5-10%)
APPLICATION	Brush, roller or painting gun
NATURE	Synthetic
PERFORMANCE	14-16 m²/l.









## Synthetic SATIN VARNISH

Synthetic varnish to protect all kinds of interior and exterior wooden surfaces. Excellent hardness and easy brushing. Suitable to be applied on doors, windows, furniture, wardrobes, beams, etc.



4 L	62,30	2
750 ml	13,54	6
375 ml	9,13	8
	F-1111	10000



COLOR	Colorless
ASPECT	Satin
DILUTION	Solvent (5-10%)
APPLICATION	Brush, roller or painting gun
NATURE	Synthetic
PERFORMANCE	13-16 m <sup>2</sup> /l.







## Synthetic MATT VARNISH

Synthetic varnish to protect all kinds of interior and exterior wooden surfaces. Excellent hardness and easy brushing. It serves to be applied over doors, windows, furniture, wardrobes, beams, etc.



4 L	64,47 2
750 ml	13,96 6
375 ml	9,59 8













## Interior VARNISH-Glossy

High-gloss synthetic varnish to apply on interior wooden surfaces. High flexibility and easy brushing. It serves to protect doors, windows, furniture, wardrobes, beams, etc.



PERFORMANCE

4 L	48,63	2
750 ml	10,97	6
375 ml	7,40	8



DLOR	Colorless	
SPECT	Glossy	1
LUTION	Solvent (5-10%)	
PPLICATION	Brush, roller or painting gun	
A DESCRIPTION OF THE PARTY OF T	P. Carlotte and Company of the Compa	

12-15 m2/l





## WATERBORNE STAIN VARNISH

### WITH POLYURETHANE

COLOR

ASPECT

NATURE PERFORMANCE

DILUTION

APPLICATION


### Exterior/Interior

Waterborne stain varnish in glossy finish. Protect, enhance and nourish wooden surfaces. Waterproof wood and protect it against dampness, stains and scratches. Reinforced with polyurethane resins to endow it with hardness.





4 L	61,55
750 ml	13,93
375 ml	8.31













### Color Chart\*

These colors are indicative





Brown





Oak













### XYLAMAR Lasur

Matt Colors Water-based Exterior/Interior

Waterborne open-pore preservative filler. It stains wooden surfaces in transparent colors so that the natural aspect of wood can be appreciated. Non-film forming, it does not crack, appropriate for protecting wood against elements, rainwater and high insulation. It contains additives to protect wood against tannins, U.V. rays and dampness. To better protection, apply Xylamar Satin Lasur.



## XYLAMAR Lasur Colorless

### Satin Finish

### Exterior/Interior

Open-pore satin-finish waterborne lasur. It serves to protect woods exposed to adverse environmental elements, maintaining its original color. High slump resistance due to its thixotropy. Non-film forming, it does not crack. Very resistant to temperature changes. Protection against dampness and UV rays, allowing the wood to breathe.



4 L	67,00 2
750 ml	16,20 6
375 ml	11,12 8

COLOR	Colorless
ASPECT	Satin
DILUTION	Ready-to-use or water (3%)
APPLICATION	Brush, roller or painting gun
NATURE	Acrylic
PERFORMANCE	12-14 m <sup>2</sup> /l.









### Color Chart\*

These colors are indicative





1 hand	
qs	

























Green

## **UNIVERSAL SOLVENT**

Solvent to dilute or clean all kinds of synthetic paint (enamels, varnishes, lacquers, primers, sealers) it also serves to clean tools used to work with solvent-based products.



	25	L	plastic container	108.37	
	THE	177	plastic container		4
	1	L	metal container	6,84	15
50	0 m	1	metal container	4,91	16

COLOR	Colorless
ASPECT	Liquid

## **GEL PAINT STRIPPER**

Exterior/Interior

Gel paint remover, easy to apply and clean. Used for stripping paints, varnishes, lacquers and all kinds of synthetic paints.



1	L	metal container	20,64	15
---	---	-----------------	-------	----

COLOR	Colorless
ASPECT	Gel
DILUTION	Ready-to-use
APPLICATION	Brush, roller
PERFORMANCE	Depending on the material to strip

## **PURE TURPENTINE**

Turpentine essence. Used to dilute synthetic and oily products, providing them an excellent brush ability.



5	L	plastic container	29,34	4
1	L	plastic container	6,71	20

COLOR	Colorless
ASPECT	Liquid

## SIMILE TURPENTINE

Simile turpentine for drugstore. Used to dilute synthetic and oily products.



	1	L	plastic container	5,41	20
500	n	٦l	plastic container	3,30	24

COLOR	Colorless
ASPECT	Liquid

## **BASIC** Primer

BÁSICO

Acrylic

7-9 m2/1.

COLOR

ASPECT

DILUTION

NATURE

**APPLICATION** 

PERFORMANCE

Waterborne product used to prime walls to be painted with decorative paints which require an absorbent porous surface. Used to prime: Efcto Metal / Gotiko / Tierras di Roma / Muro Antiguo / Venice / Eoleon.

3 L











//////////////////////////////////////	///////////////////////////////////////	11
White	- COMMONDADA	-
Matt		17
Water (10-15%)	1000	
Brush, roller or painting g	gun	

23,08





## **PRIMER**

AMARTO

PRIMER

Whi

Sem

Wat

Vinyl

8-10 m2/l.

Waterborne product used to prime walls to be painted with decorative paints which require a slippery surface. It serves to prime: Kenia / Veladura griega.











ite	
ni-glossy	
ter (10-15%)	

Brush, roller or painting gun

29,31







COLOR

ASPECT

DILUTION

PERFORMANCE

Dye made from acrylic resins, used to provide color and hardness to different decorative products included within Design Paints. It is advisable to mix dye and paint by hand, in order not to ruin the final product. Used to stain: Tierras di Roma, Gotiko, Veladura Griega, Kenia.









50	ml	10,18	6



Color Chart Liquid

## **TIERRAS DI ROMA**

Interior

This product creates a mix of blurred effects and colors by means of a combination of different minerals and particles contained in it. Antique effect



2,5 L 58,19

COLOR	Neutral
ASPECT	Matt
DILUTION	Ready-to-use or water (1%)
DYE	Toner
PRIMER	Basic primer
DEDECORMANICE	0.10 2/1







## **GOTIKO**

Interior

New high-decoration product, recreates a modern atmosphere full of blurred effects in different tonalities, due to the combination of black and white particles contained in the



Basic primer

8-10 m<sup>2</sup>/l.

64,14



Neutral with black particles	
Matt	
Ready-to-use or water (1%)	
Toner	





## **METAL Efect**

Exterior/Interior

Futuristic waterborne paint to decorate surfaces with a new a modern metallic effect. Ready-to-use product.













### Color Chart\*

These colors are indicative



COLOR **ASPECT** DILUTION DYE PRIMER

PERFORMANCE



Gold Lingot



Old Gold



Copper




COLOR **ASPECT** 

DILUTION

**PRIMER** PERFORMANCE

2.5 L

59,95 19,61



## Muro ANTIGUO-Rustic Effect

Interior

Paste-like product, made from cellulosic resins that gives your surfaces a peach-skin effect. Suitable to recreate antique and rustic effects. Rustic plastering effect, to finish with Patina Sahara.











## **PATINA SAHARA** - Neutral

Exterior/Interior

Neutral waterborne patina used to protect and to achieve decorative effects. It can be used as a protective varnish, as a patina over Muro Antiguo or as a glazing to obtain decorative effects. This is a neutral-color product to be stained in any desired color by applying either universal to waterborne colorant.







COLOR	Neutral
ASPECT	Semi-glossy Semi-glossy
DILUTION	Ready-to-use
PERFORMANCE	12-14 m²/l.





## KENIA

COLOR

**ASPECT** 

DILUTION DYE PRIMER

**PERFORMANCE** 

Interior/Exterior

By applying this product we will achieve a contrast of two tones of the same color, producing tactile and optical effects that will give a personal touch to your home. Sand effect.



Neutral

Semi-glossy Ready-to-use

Basic primer

5-6 m<sup>2</sup>/l.

3 L 32,70



	<u></u>
ſ	<u> </u>
ı	AL ACT



## **VELADURA GRIEGA**

Interior/Exterior

Glazing used in both interior and exterior decoration that, by means of innumerable chromatic combinations, enables you to create different atmospheres.



3 L	32,07
50 ml	9,75



COLOR	Neutral
ASPECT	Semi-glossy
DILUTION	Ready-to-use
DYE	Toner
PRIMER	Basic primer
PERFORMANCE	15-16 m²/l.





## **WAX STUCCO Lucid**

Interior

Waterborne decorative finish made from emulsions of waxes, used to enhance high shine, protect and beautify walls, columns or any surface where Stucco Venice has been applied.



COLOR

**ASPECT** 

DILUTION

**PERFORMANCE** 

750 gr

Colorless

Ready-to-use 10-15 m<sup>2</sup>/kg.

Glossy



17,56 6







## Synthetic Stucco-VENICE Neutral

terior

Synthetic stucco for indoor applications. Simulated marble effect obtained by means of an easy spatula application.



20 Kg	130,99
5 Kg	45,27
1 Kg	11,55





DLOR	Neutral
SPECT	Glossy Marble
ILUTION	Ready-to-use
/E	Tintamar

1,4-1,6 m<sup>2</sup>/l.







### Oxi-mar

### Xylamar Hidro-enamel Primers



Oxi-mar color charts



# Amarel

Enamels color charts

## Designer **PAINTINGS**



Designer paintings color charts

## Monolayer paint

Wide range of colors



Smooth

### TRIPOL COATING



Color charts coating

Monolayer paint color charts

## **LOOSENING Lubricant** Spray

Loosening lubricant in spray for professional use, with high throwing power in rust areas. It serves to unlock metallic elements, acting quickly against the rust.





270 cc.

6,30 12

COLOR	
ASPECT	
PROPERTIES	

Colorless Oily

Quick action

### **STAIN REMOVER** in Spray

Interior - Exterior

Spray paint to cover stains of dampness, soot grease, nicotine, rust, smoke, etc.





520 cc.



## **WOOD VARNISH** in Spray

Interior - Exterior

Synthetic colorless varnish in spray, indicated for minor works of Diy, marquetry and modalism. Perfect high-gloss finish. It can be applied over most parts of surfaces, except the acrylic ones.



270 cc.

6,60 12

COLOR **ASPECT**  Colorless Glossy

PROPERTIES Great hardness



## **ANTICORROSIVE UNIVERSAL**

### Primer

Interior - Exterior

Spray paint to prime metallic surfaces. Quick drying. Great protective power when used as antioxidant primer to paint with enamels, luminescent or fluorescent finishes, etc.



520 cc.

COLOR **ASPECT** 

White Matt

**PROPERTIES** 

Anticorrosive

## **HEATPROOF**

**Spray Paint** 

Spray paint indicated for upkeep and maintenance of surfaces that withstand high temperatures: stoves, chimneys, barbeques, motors, tailpipes, machinery, etc. Withstand until 600°C without cracking.



520 cc.

10,10 6

COLOR	Black
ASPECT	Matt
PROPERTIES	High-temperature resistant

### WHITE PAINT FOR APPLIANCES AND RADIATORS Interior/Exterior **Spray Paint**

Spray paint indicated for refurbishing and decorating house appliances and radiators. Suitable for mending scratches and strokes on fridges, dishwashers, washing machines, heaters or any enameled surface.



White Glossy Great hardness

COLOR



520 cc.

## **ALUMINUM RIMS**

**Spray Paint** 

COLOR

Exterior/Interior

Spray paint special for painting both aluminum and steel rims of cars, motorcycles and trucks. It can also be used for protecting and decorating metallic surfaces on doors, cranes, electric poles, radiators and fences.



520 cc.

8,55 6

Silver ASPECT Satin (Semi-Glossy) High covering power **PROPERTIES** 

## SPRAY PAINT FOR DECORATION

Exterior/Interior

Spray paint for decoration. Indicated for both Diy and old professional works of decoration, labeling or signaling.



COLOR	White and Black
ASPECT	Glossy
PROPERTIES	Great covering power

### PROFESSIONAL DRIP ROLLER - ROUND

Dimensions Price Und/Box
22 cm 9,76 12

### DRIP ROLLER diva




### FAÇADE ROLLER ROUND-professional




### PADDED THREAD ROLLER - ROUND



### SPARE ROLLER ENAMEL pore 0



### REPLACEMENT VELOR ROLLER



### **Drip ROLLER REPLACEMENT**



Dimensions	Price	Und/Box
5 cm	0,84	20
10 cm	1,05	10

### REPLACEMENT RODS

V//		
Dimensions	Price	Und/Box
Mini rod	1,41	50
Short rod	1,59	50

### **MASKING** tape



Dimensions	Price	Und/Box
24 cm x 45 mt	1,86	48
36 xm x 45 mt	2,79	32
48 cm x 45 mt	3,69	24

### Paper with tape



Utensil.

Dimensions	Price	Und/Box
15 cm x 45 mt	3,60	30
30 xm x 45 mt	4,95	15

### **SANDPAPER BLOCK**



Grain	Price	Und/Box
Fine	0,93	50
Medium	0,93	50
Thick	0,93	50

### **SANDPAPER SPONGE**



Grain	Price	Und/Box
Fine	0,87	50
Medium	0,87	50
Thick	0,87	50

### DOUBLE WHITE bristle pallet



Dimensions	Price	Und/Box
9	1,53	12
12	1,68	12
15	2,07	12
18	2,70	12
21	3,15	12
24	3,51	12
27	3,84	12
30	4,95	12
33	7,18	12

### GREEN HOOP pressed brush



Dimensions	Price	Und/Box
7	5,71	12
8	7,06	12
10	10,21	12
12	11,71	12
14	14,26	12
11111		<del>- 1777/1111</del>

## ROUND BRUSH green hoop

28



ions	Price	Und/Box
	6.61	12

### MASK with CE-FFP2 filter



Price	Und/Box	
1,65	80 (sachets 10 uds.)	

### **OLD LAND** pallet



Dimensions	Price	Und/Box
7 cm	7,06	12
10 cm	13,96	12

### **SPATULA**



Price	Und/Box	
4,80	1/ 12	

### FOILS covers all 7 microns



Dimensions	Price	Und/Box
4mt x 5mt	1,65	50

### PLASTIC coil covers all



Dimensions	Price	Und/Box
2 mt x 50mt	7,21	10

### BLANKET cover 270gr/m²



Dimensions	Price_	Und/Box
100cm x 25mt	43,54	1



### **GENERAL CONDITIONS**

Delivery of merchandise sent by transportation agency will be for the account of the buyer, even with prepaid carriage.

Breakdown, loss or damage to goods, as well as any delivery delay, will be reclaimed to transportation agency (clarify this circumstance in the delivery note). It is advisable to check the merchandise received in order to discover any possible damage. Any claim must be noted in the delivery note and reported to the company in the four days following the date of reception.

Returns are not accepted after 30 days of the date of reception. Returns are not accepted in case of open containers or with lack of product, by events out of the control of the company. The mean of transport used to send the merchandise will be chosen by the company; on the contrary, the customer will be responsible for paying the difference of costs.

The delivery of merchandise will be blocked in case of non-payment of bills, untils the debt has been repaid in full. Our sales software blocks any operation in this case.

The payment of any tax over transactions will be up to the customer.

In the event of litigation, only the justice courts of the office of La Roda (Albacete) will be used.

The company will be only responsible for the value of the product.

Prices included in this price list can vary according to market variations. These changes may be communicated by the sales representive by means of an email, phone call, etc.

Prices included in this price list are the recommended ones for sale to the public. VAT NOT INCLUDED.

This price list negates the validity of all previous price lists.

### **PACKAGING ORGANIZATION**

BA

		Unid/Box	Unid/Palet	Long x width x high
	CONTAINER 14 Lt.	1	33	120 x 80 x 102
	CONTAINER 8 Lt.	1	44	120 x 80 x 110
PLASTIC	CONTAINER 4 Lt.	1	120	120 x 80 x 113
PAINT	CONTAINER 1 Lt.	6	45	120 x 80 x 96
	CONTAINER 750 ml.	6	60	120 x 80 x 105
	MONOLAYER PAINT 4 Lt.	1	96	120 x 80 x 96
	CONTAINER 1 Lt.	6	45	120 x 80 x 96
COLORS	CONTAINER 250 C.C.	9	96	120 x 80 x 96
	CONTAINER 50 C.C.	20	180	120 x 80 x 73
	CONTAINER 15 Lt.	1	33	120 x 80 x 100
	CONTAINER 4 Lt.	2	44	120 x 80 x 100
	CONTAINER 1 Lt.	6	72	120 x 80 x 108
	CONTAINER 750 ml.	6	72	120 x 80 x 108
	CONTAINER 375 ml.	8	84	120 x 80 x 90
	SACK 15 Kg. Powder	1	72	120 x 80 x 130
	CONTAINER 5 Kg. Powder	4	28	120 x 80 x 117
	CONTAINER 1 Kg. Powder	20	27	120 x 80 x 128
	CONTAINER 20 Kg. Powder	1	33	120 x 80 x 102
	CONTAINER 5 Kg. Pasta	1	120	120 x 80 x 100
	CONTAINER 1 Kg. Pasta	12	45	120 x 80 x 127
	CONTAINER 350 Gr. Pasta	27	45	120 x 80 x 127
	CONTAINER 25 Lt.	1	28	120 x 80 x 104
SOLVENTS	CONTAINER 5 Lt.	4	24	120 x 80 x 104
	CONTAINER 1 Lt.	15	30	120 x 80 x 101
	CONTAINER 500 ml.	16	36	120 x 80 x 98
ECORATIVE CKGROUNDS	CONTAINER 4 Lt.	4	44	120 x 80 x 100
	CONTAINER 2,5 Lt.	1	126	120 x 80 x 93
	CONTAINER 1 Lt.	6	60	120 x 80 x 110
	CONTAINER 250 ml.	6	-	-

### **SHIPPING RATE**

### Minimum order for carriage paid:



KGS	PENINSULA
5	7,54€
10	8,07€
20	11,61 €
30	15,04€
40	18,12€
50	20,71€
60	21,80€
70	24,27 €
80	26,74€
90	27,01€
100	29,41 €
125	31,72€
150	36,96€
175	40,26€
200	45,05€
250	49,91 €
300	56,41 €
350	63,26€
400	69,90€
450	76,62€
500	83,66€
600	98,41 €
700	111,98€
800	125,68 €
900	139,62€
1000	155,49€
+1000	0,14€

\*The products are supplied by complete boxes

Pallet cost 5€ to be paid upon return of the same

